



FNT 3000-Steam

Steam bath control

Key features:


- **Elegant, high-quality glass touch control panel**
- **Simple, intuitive, language-neutral operation**
- **Low installation depth**
- **Display lighting signals heating status**

Scope of delivery:



- **1 x steam bath control unit**
- **1 x probe sensor for steam bath**




Dimensions:

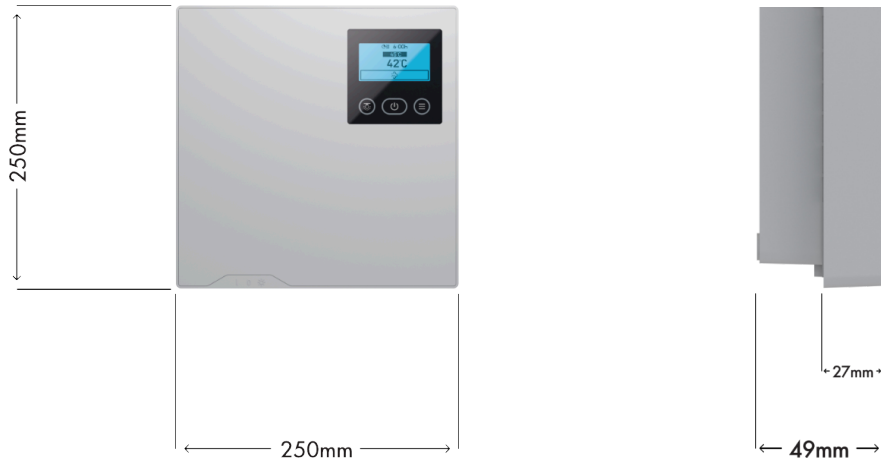

Sensors and device assembly:

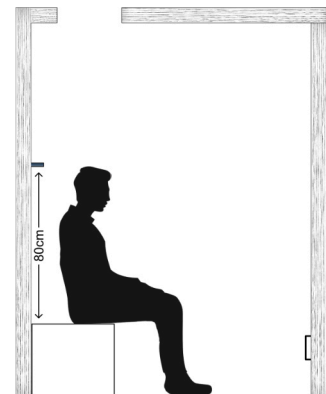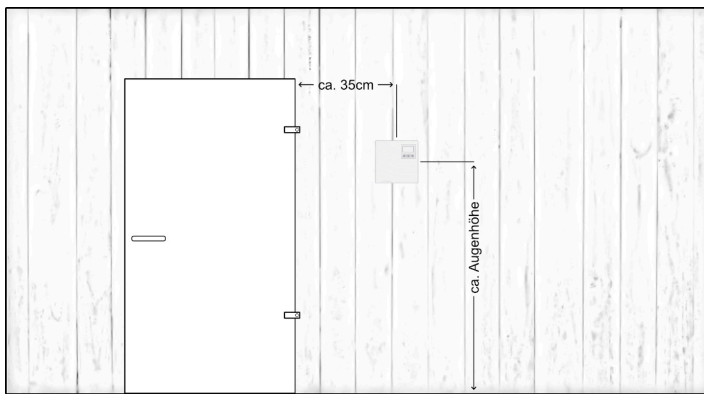

Connection diagram:

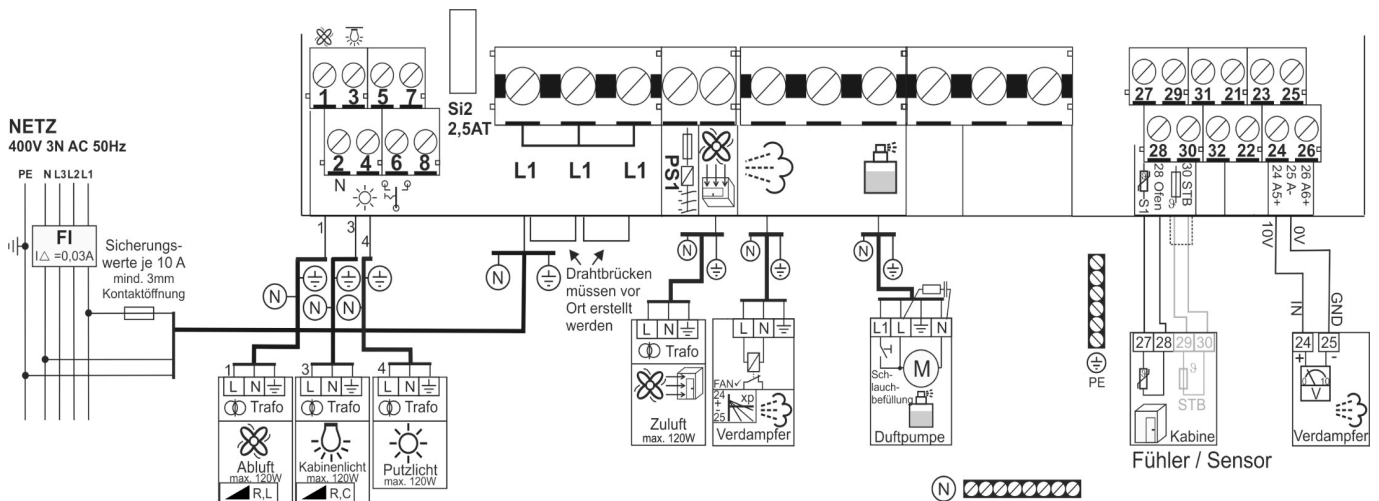

Accessories

Description
probe sensor with 5m cable length
Protective coating on the circuit board for increased corrosion protection in the event of condensation
Stand-alone music module with 2x10W output power
2x50W speakers incl. 5m connecting cable
probe sensor for seat bench heating
Cabin interior display in black / white
Cabin interior control panel in black / white
Control unit for operation with smartphone or tablet via the Internet
Control unit for operation with smartphone or tablet via BT (approx. 5 m range)
Control unit for connection to KNX bus
Connection to an RGB(W) controller from Licht 2000
2x analogue outputs 0-10V

Technical data

Item no.	Electrical connection	Switching capacity	Temperature range	Light connection	Fan connection	Heating time limit	Ambient Temperatures during operation	Weight with repacking
FNT3000-STEAM	230V 1N ~ 50Hz	Release for external evaporator Optional bench heating 2kW	30-50°C	Max. 120W (resistive, capacitive load)	Max. 120W (resistive, inductive load)	6h (max. 20h)	0 bis +40°C	1,9 Kg

Technical changes reserved